


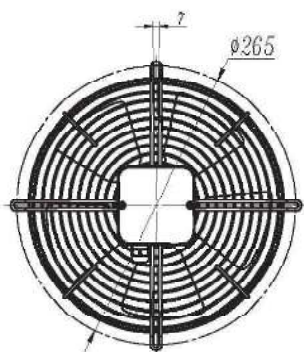
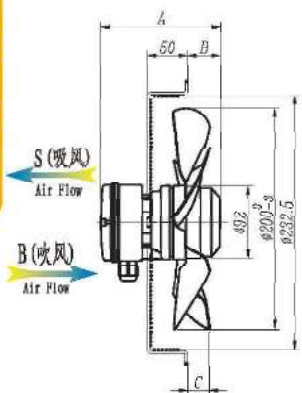
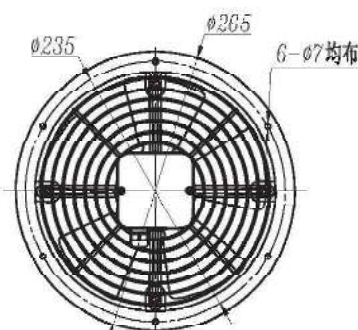





型号 MODEL	尺寸		
	A	B	C
YWF4D (B)-200S (B)-DSZ	140	29	17
YWF2D (B)-200S (B)-DSZ	145	34	22

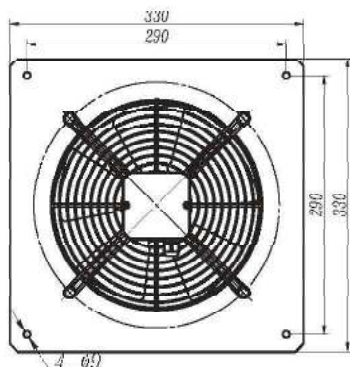



型号 MODEL	尺寸
YWF4D (B)-200S (B)-HSZ	47
YWF2D (B)-200S (B)-HSZ	42

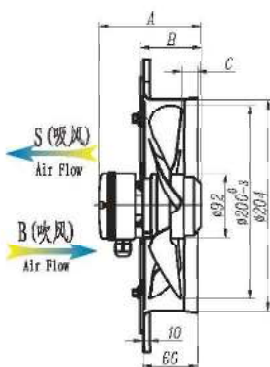

型号 MODEL	尺寸		
	A	B	C
YWF4D (B)-200S (B)-GSZ	140	82	6
YWF2D (B)-200S (B)-GSZ	145	87	6.5

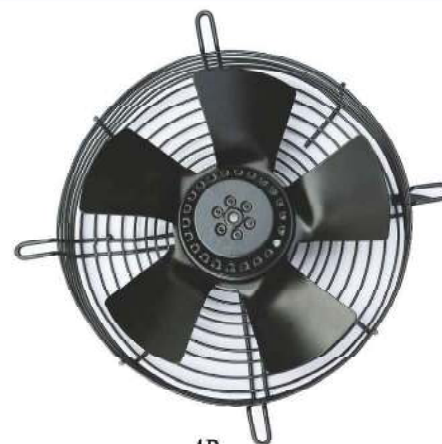



- 防护等级：IP54
Type of protection: IP54
- 绝缘等级：“B” “F”
Insulation class: “B” “F”
- 工作方式：S1
Mode of operation: S1
- 轴承：免维护轴承
Bearings: Maintenance-free bearings

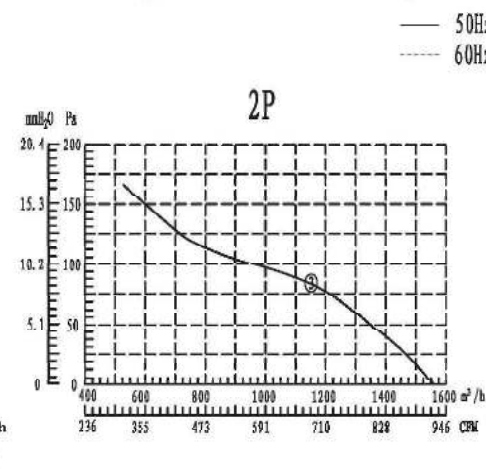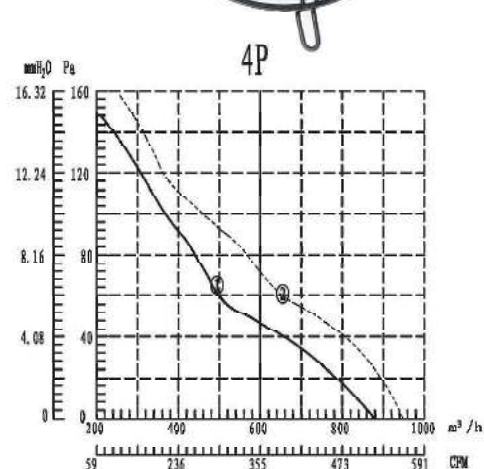



技术参数 Technical data

型号 Model	曲线 Curve NO.	额定电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Power input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 Air Volume	允许静压 Max. static Pressure	净重 N.W.
	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa		Kg
YWF4D-250-DSZ	①	380	50	0.2	50	1400	55	/	880 / 60		2.7
	②	400	60	0.25	60	1500	58	/	925 / 68		2.7
YWF4D-250-BSZ	①	220	50	0.23	50	1430	55	1.5	880 / 60		2.7
	②	230	60	0.22	55	1700	58	1.5	925 / 68		2.7
YWF2D-250-DSZ	③	380	50	0.28	130	2550	72	/	1565 / 120		2.8
	④	220	50	0.41	90	2720	75	4	1565 / 120		2.8

• 表中参数如有更改恕不另行通知 We will not inform you if we change the data in the form

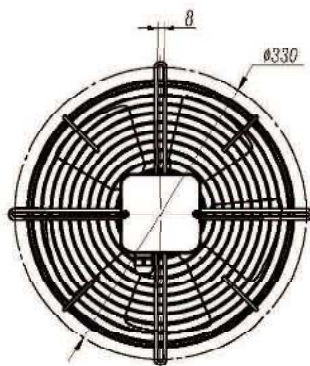
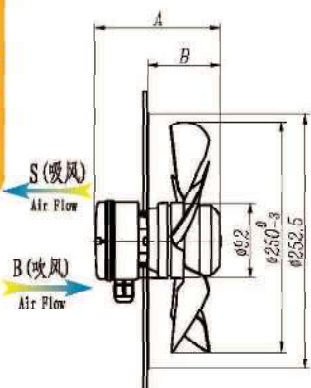


型号 MODEL	尺寸	
	A	B
YWF40 (R) - 250S (R) - BSZ	145	80
YWF20 (R) - 250S (R) - BSZ	155	90

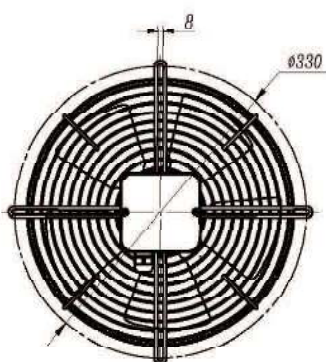
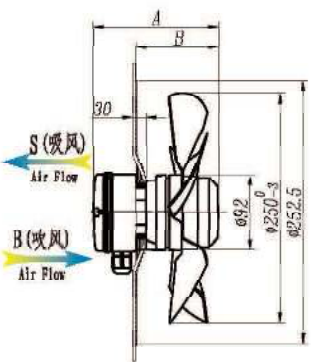


型号 MODEL	尺寸	
	A	B
YWF40 (R) - 250S (R) - CSZ	145	110
YWF20 (R) - 250S (R) - CSZ	155	120



Model NO. B	Model NO. C	Model NO. D	Model NO. E	Model NO. H	Model NO. G	Model NO. K
YWF40 (R) - 250S (R) - BSZ	YWF40 (R) - 250S (R) - CSZ	YWF40 (R) - 250S (R) - BSZ	YWF40 (R) - 250S (R) - BSZ	YWF40 (R) - 250S (R) - BSZ	YWF40 (R) - 250S (R) - CSZ	/
YWF20 (R) - 250S (R) - BSZ	YWF20 (R) - 250S (R) - CSZ	YWF20 (R) - 250S (R) - BSZ	YWF20 (R) - 250S (R) - BSZ	YWF20 (R) - 250S (R) - BSZ	YWF20 (R) - 250S (R) - CSZ	/

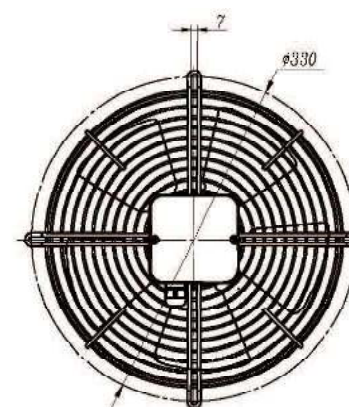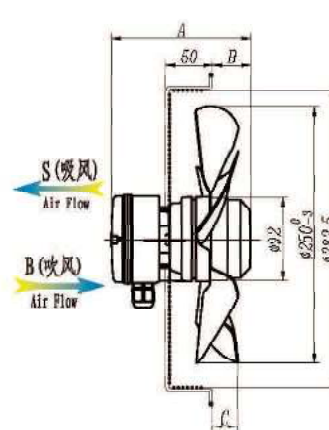



型号 MODEL	尺寸		
	A	B	C
YWF40 (R) - 250S (R) - BSZ	145	34	18
YWF20 (R) - 250S (R) - BSZ	155	44	28

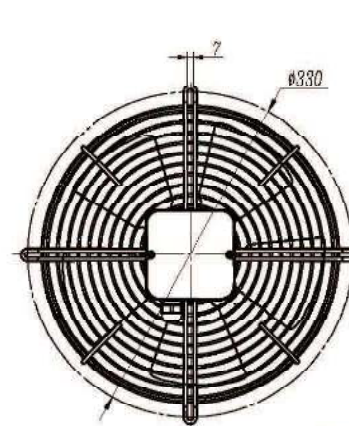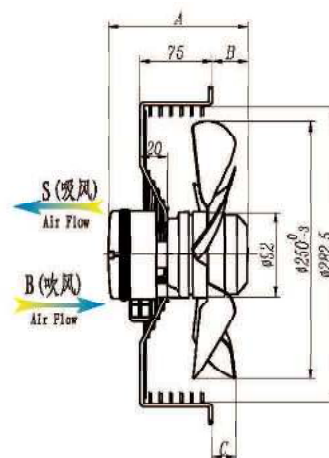

型号 MODEL	尺寸		
	A	B	C
YWF40 (R) - 250S (R) - BSZ	145	30	18
YWF20 (R) - 250S (R) - BSZ	155	40	28

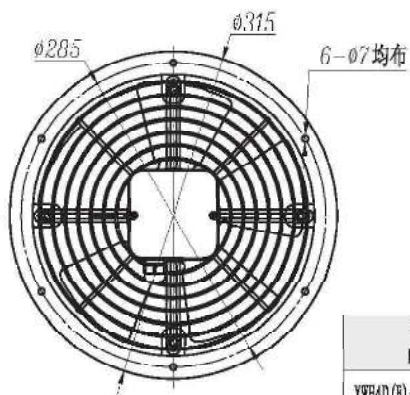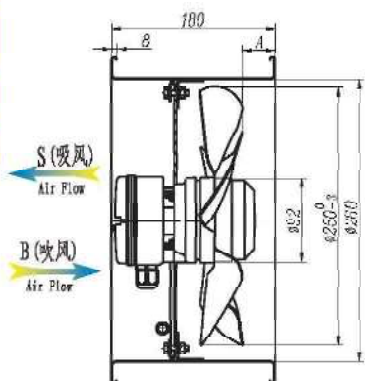

型号 MODEL	尺寸 A
YWF4D(R)-250S(R)-HSZ	41
YWF2D(R)-250S(B)-HSZ	31

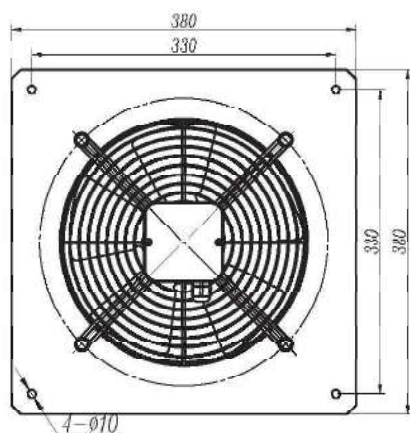
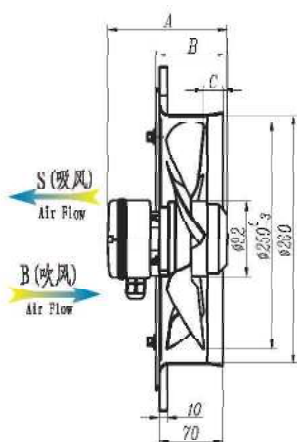


型号 MODEL	尺寸		
	A	B	C
YWF4D(R)-250S(B)-GSZ	145	82.5	5.5
YWF2D(R)-250S(B)-GSZ	155	92.5	3



- 防护等级: IP54
Type of protection: IP54
- 绝缘等级: "B" "F"
Insulation class: "B" "F"
- 工作方式: S1
Mode of operation: S1
- 轴承: 免维护轴承
Bearings: Maintenance-free bearings

— 50Hz
--- 60Hz

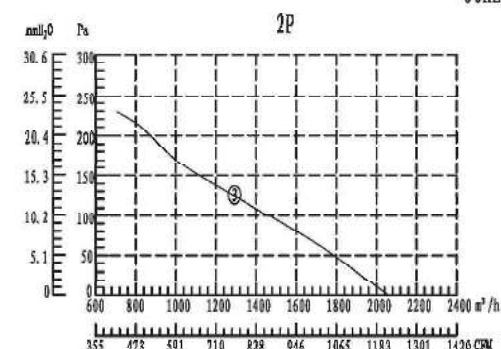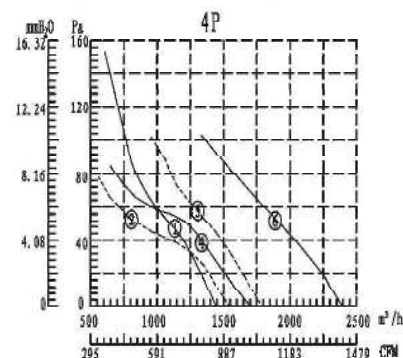

技术参数 Technical data

型号 Model	曲线 Curve NO.	额定电压 Voltage	频率 Frequency	额定电流 Current	输入功率 Power input	转速 Speed	噪音 Noise	电容 Capacitor	额定风量 Air Volume	允许静压 Max static Pressure	净重 N.W.
	#	V	Hz	A	W	RPM	dB(A)	μF	m³/h / Pa	kg	
YWF4D-300-B5Z	①	380	50	0.22	70	1440	60	/	1450 / 60	3.2	
	②	400	60	0.18	85	1600	62	/	1525 / 68	3.2	
YWF4B-300-B5Z	①	220	50	0.4	80	1380	60	2	1450 / 60	3.2	
	②	230	60	0.52	110	1500	62	2	1525 / 68	3.2	
YWF2D-300-B5L	③	380	50	0.5	250	2500	70	/	2065 / 100	3.3	
YWF2B-300-B5L	④	220	50	0.85	180	2300	70	8	2165 / 105	3.3	
YWF4B-300M-B6L	④	220	50	0.42	85	1400	68	3	1700 / 65	3.6	
	⑤	230	60	0.36	80	1700	70	2.5	1785 / 60	3.6	
YWF4D-300M-B6L	④	380	50	0.2	70	1400	68	/	1700 / 65	3.6	
YWF4B-300F-B5F	⑥	220	50	0.44	93	1330	60	2.5	2390 / 60	3.2	
YWF4D-300F-B5F	⑥	220	50	0.23	85	1360	60	/	2390 / 60	3.2	

• 表中参数如有更改恕不另行通知 We will not inform you if we change the data in the form